


1 GROUND FLOOR CEILING
1 : 100

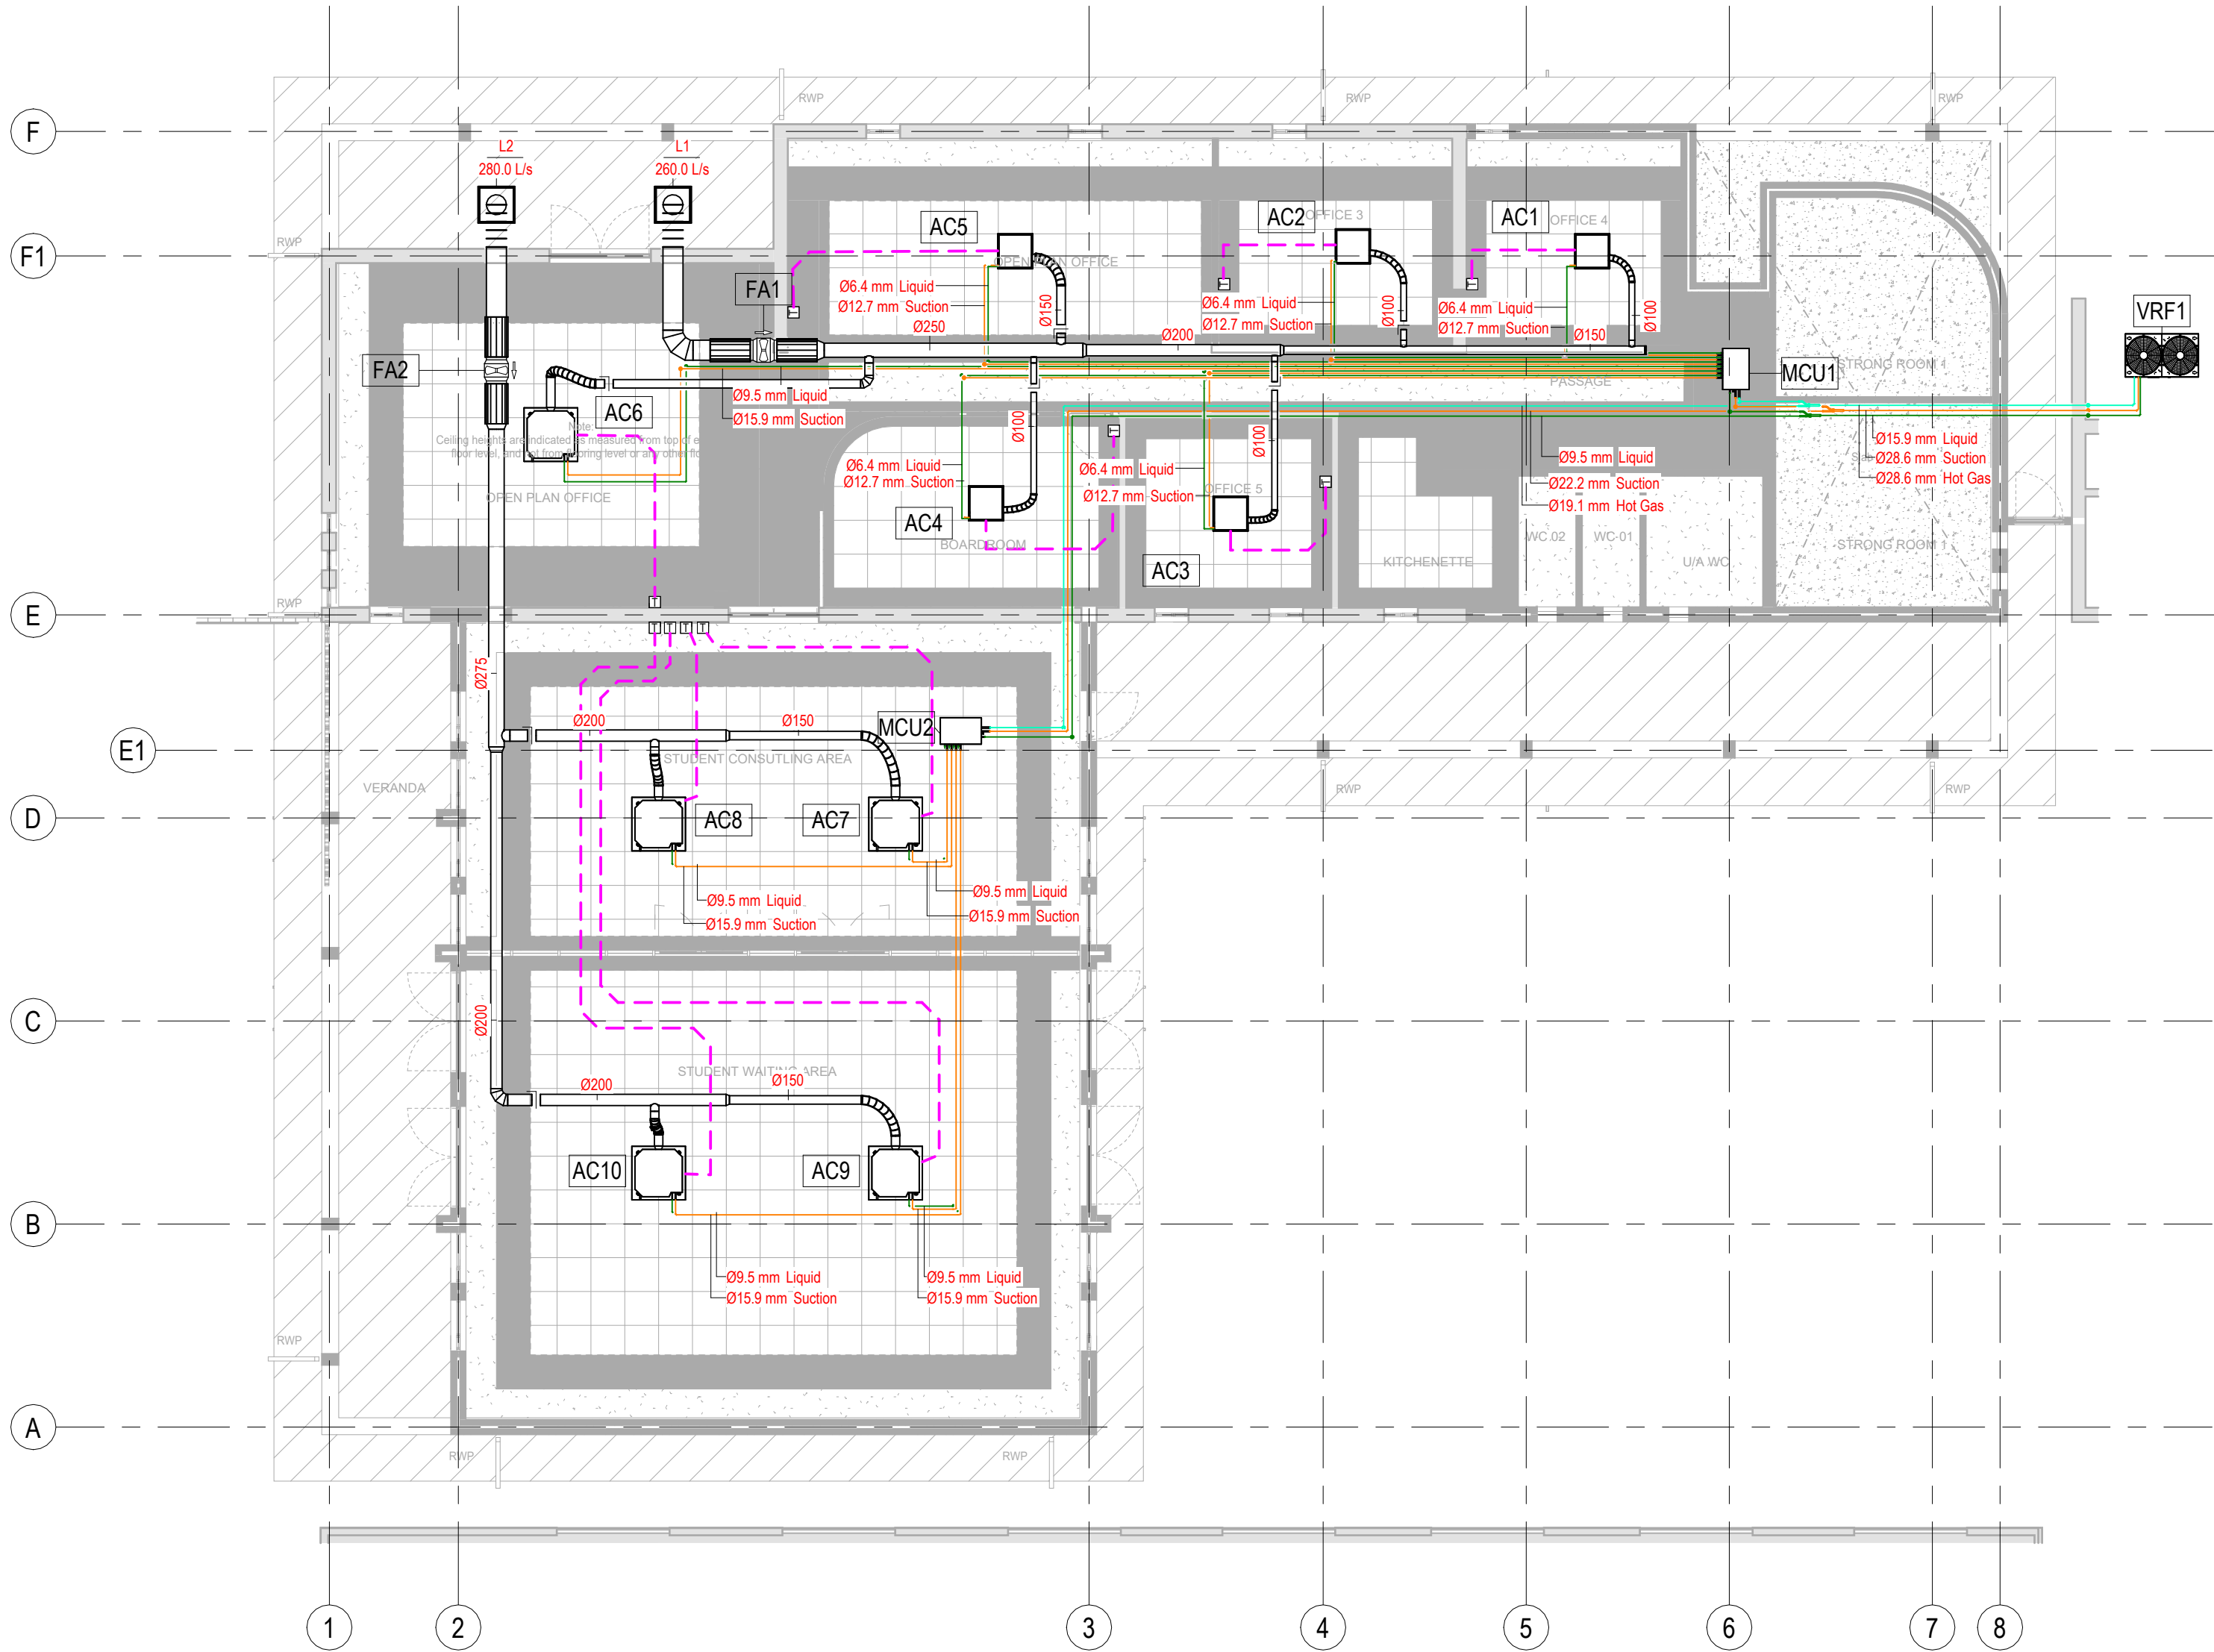

Air Terminal Schedule						
Mark	Description	Duct Connection Size			Air Flow	
		Width	Height	Diameter	Supply	Return
L1	Return air louvre, complete with GMS plenum box with 355mm spigot. Complete with filter frame and G4 primary filter media.			355	260.0 L/s	
L2	Return air louvre, complete with GMS plenum box with 355mm spigot. Complete with filter frame and G4 primary filter media.			355	280.0 L/s	

Mechanical Equipment Schedule				
Mark	Description	Capacity Cooling	Capacity Heating	Supply Air Flow
AC1	Ceiling Cassette unit, 600x600, 4-way blow.	2.8 kW	3.2 kW	30.0 L/s
AC2	Ceiling Cassette unit, 600x600, 4-way blow.	2.8 kW	3.2 kW	30.0 L/s
AC3	Ceiling Cassette unit, 600x600, 4-way blow.	2.8 kW	3.2 kW	30.0 L/s
AC4	Ceiling Cassette unit, 600x600, 4-way blow.	3.6 kW	4.0 kW	30.0 L/s
AC5	Ceiling Cassette unit, 600x600, 4-way blow.	5.6 kW	6.3 kW	70.0 L/s
AC6	Ceiling Cassette unit, 4-way blow.	7.1 kW	8.0 kW	70.0 L/s
AC7	Ceiling Cassette unit, 4-way blow.	7.1 kW	8.0 kW	70.0 L/s
AC8	Ceiling Cassette unit, 4-way blow.	7.1 kW	8.0 kW	70.0 L/s
AC9	Ceiling Cassette unit, 4-way blow.	7.1 kW	8.0 kW	70.0 L/s
AC10	Ceiling Cassette unit, 4-way blow.	7.1 kW	8.0 kW	70.0 L/s
MCU2	Mode control unit, 6-port			
MCU1	Mode control unit, 6-port			
FA1	Mixed flow fan driven by 2-speed single-phase motors with integral thermal protection			260.0 L/s
FA2	Mixed flow fan driven by 2-speed single-phase motors with integral thermal protection			280.0 L/s
VRF1	VRF Outdoor Unit	56.0 kW	63.0 kW	

No.	Date	Description
A	2025/10/20	Issued for information.
B	2025/11/17	Issued for Tender

NOTE:
ALL MEASUREMENTS TO BE CHECKED ON SITE.
IF IN DOUBT, ASK.
THIS DESIGN & DRAWING IS THE INTELLECTUAL & CONFIDENTIAL PROPERTY OF CA du Toit EC (PTY) LTD AND MAY NOT BE DISCLOSED TO THIRD PARTY, COPIED OR REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF CA du Toit EC (PTY) LTD.

CAduToit Eastern Cape (Pty) Ltd
CONSULTING ENGINEERS / RAADGEWENDE INGENIEURS
22 Shirley Street
Newton Park
GOEBERHA
6045
E-mail
pe@cadutoittec.co.za
Telephone
+27 (0)41 585 7559

PROJECT:	University of Fort Hare - Alice Campus UFH - Alice Campus Finance Offices Conversion
DRAWING:	MECHANICAL INSTALLATION HVAC LAYOUT

SCALE (on A1):	DATE:
1 : 100	2025/10/20
DRAWN:	DESIGNED:
A. BROWN	A. BROWN
APPROVED:	VERIFIED:
	A. STRAUSS

ISSUED FOR:	TENDER
-------------	--------

DRAWING NUMBER:	Project Ref:	P8080M02
P8080M02-001		
Revision No.:		B